

## LEANSTRIPE

Lowest profile of all our floor marking tapes; creating a smooth transition and minimizes side impacts to the tape itself, resulting in a longer life span. The strongest adhesion solution of the entire DuraStripe family.

**Durability** ●●●●○

**Adhesive** ●●●●●

**Rigidity** ●●●●○

**Low Profile** ●●●●●

**Standard Colors** ●●●●●●●●●●

**Hazard Colors** ●●●●●●●●●●

**Custom Colors** ●●●●●●●●●●

### Strongest Adhesion

**250% stronger** - almost permanent - adhesion for aisle striping with Hotmelt Adhesive.

### Edge to Edge Adhesive

Ensures the best possible adhesion to facility floors and reduces opportunity for tape puckering & peeling from floor.

### Ultra Low Profile & Increased Durability

Low profile to limit side impacts, maintaining a durable long lasting floor marking solution.

**\* Designed for occasional dragging/impact of pallets (easy heal), NOT pivot safe**

**Standard Thickness** : 24 mils / 0.0245" / 0.61mm

**Profile Thickness w/out Adhesive** : 15 mils / 0.015" / 0.38 mm

### Vibrant Colors

Colors that stand out against busy facility floors for easy to see 5S safety markings.

### Widths & Lengths

Standard Colors	Custom Colors	Hazard Colors	Inline Rolls
2" x 100' / 5cm x 30m	2" x 100' / 5cm x 30m	2" x 100' / 5cm x 30m	2" x 50' / 5cm x 15m
3" x 100' / 7.5cm x 30m	3" x 100' / 7.5cm x 30m	3" x 100' / 7.5cm x 30m	3" x 50' / 7.5cm x 15m
4" x 100' / 10cm x 30m	4" x 100' / 10cm x 30m	4" x 100' / 10cm x 30m	4" x 50' / 10cm x 15m
6" x 100' / 15cm x 30m	6" x 100' / 15cm x 30m	6" x 100' / 15cm x 30m	6" x 50' / 15cm x 15m

1" - 28" wide standard color rolls available - contact us for a quote

### Material Specification

Material	PVC Vinyl (All DuraStripe products are free of PFAS (per-and polyfluoroalkyl substances))
Adhesive	Hot Melt Adhesive
Resistance	Industrial and vehicle traffic, forklifts and pallet jacks, heavy foot traffic, many common chemicals
Installation	Incredibly easy to install, no professionals needed!
Warranty	3 year limited

Should not be applied on existing painted lines or on oil soaked, cracked, porous or damaged surfaces.

**www.ergomat.com - info@ergomat.com**


North & South America: +1-440-282-4651 | English (EU): + 44 3308 280 084 | Danish: + 45 702 21 840 | Dutch: + 31 73 61 30 530 | Swedish: + 46 42 16 36 00  
German: + 49 9524 30 367-50 | French: + 33 1 446 410 28 | Polish: + 48 656 97 45

Rev. 05/24/2023



# 5S Signage & Shapes

*LeanStripe* is our lowest profile of all our floor marking solutions; creating a smooth transition and minimizes side impacts to the tape itself, resulting in a longer life span.

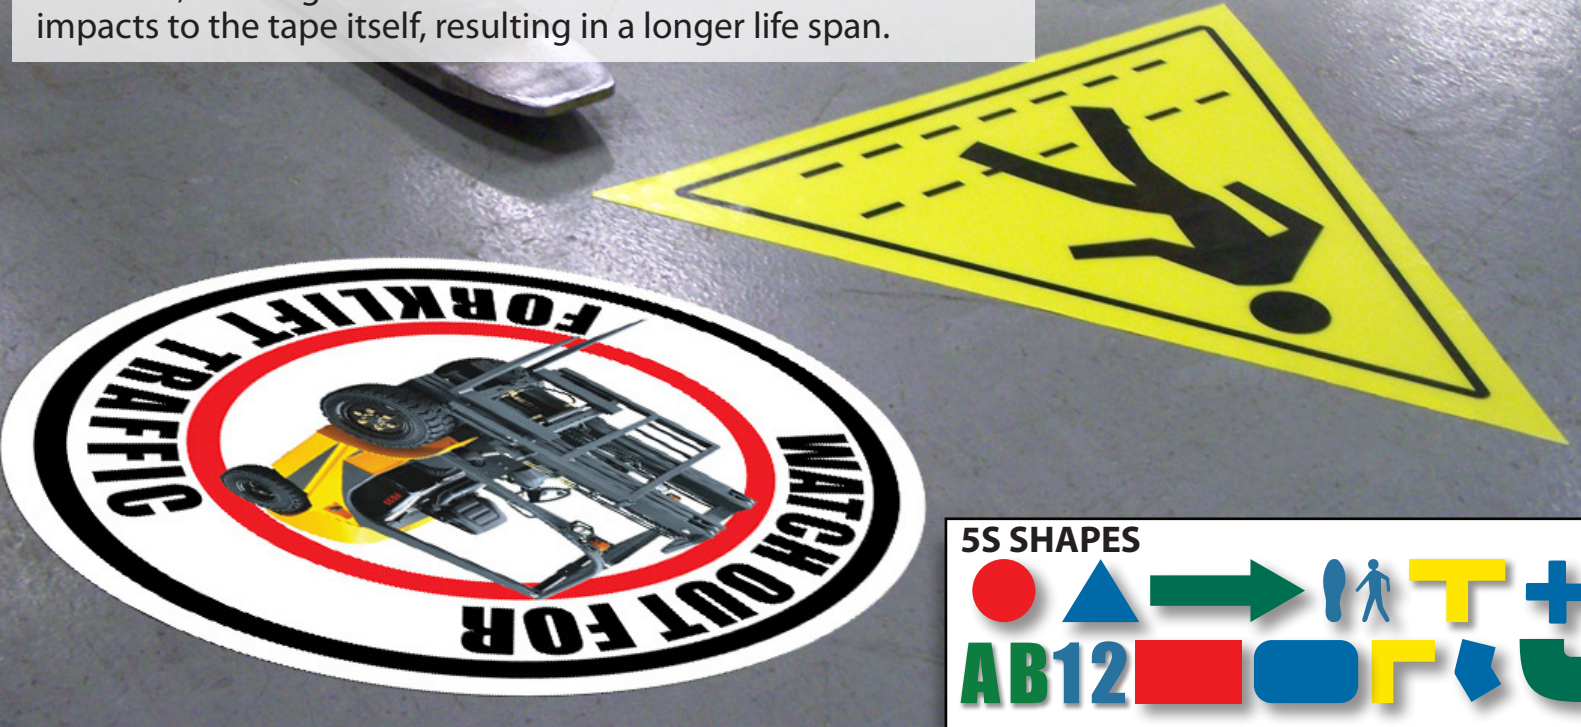

## LeanStripe Products

Match the version to your specific application. We have a solution for your floor marking applications.

### SIGNAGE



A comprehensive and growing catalog of durable peel & stick signage, coupled with an unlimited capability to produce custom signs solving every graphic marking need. Signs up to 27" (61cm)

### CUSTOM PRINTING



Can be produced with custom messages and in full color, up to 27" (68 cm) wide. Fully UV and smear resistant graphics.

### SHAPES & ICONS



Perfect tools to improve the efficiency and economy of 5S, Six Sigma and Visual Workplace programs. Available in solid colors and hazard combos.

## LeanStripe Removal



Begin LeanStripe removal with a scraper. Getting under the LeanStripe with the scraper, peel up 1-2 inches (2-5 cm) of striping.



Peel off tape at a **steep** angle (not at 90°) to minimize residue left on the floor.

*\* Rubbing alcohol or LOCTITE® SF 7070 degreaser works well to clean up any left over glue residue.*