



ERGONOMIC DESKS

 **SCREWDRIVING TECHNOLOGY**

 **WORKSPACE ORGANISATION**

 **ERGONOMICS**

 **SAFETY**

 **ESD**



Your Assembly Workspace Partner

Exquisiteness



High-performance motor
Smooth and stable movement,
Faster speed and stronger load-bearing.

Height adjustable desk frame
Height range: 600-1250mm
Suitable for people with different height.

Strict performance and aging test
ensure the satisfactory experience
in daily use.



Flexibility



Strength

The new control program developed by
FLEX BENCH has been adopted in the
controls, which optimizes anti-collision,
current protection and short circuit protec-
tion.



In some international top enterprises,
height adjustable desk is becoming the
standard office supplies.



At home, the table could fit each
member's height, so as to meet a
whole family's needs.



In the professional E-sport field,
the height adjustable desk could
help the player maintain the best form.

Multiple colors

We provide color customization for lifting
column products.
Unlimited colors satisfy the designers'
unlimited creativity.



Certification

FLEX BENCH ergonomic products have
obtained a number of international
certifications.



DF01N




Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Dual motor
- Soft start / stop
- Wired / wireless control

Specification

625 -1275 mm	650 mm	1100 - 1700 mm	1200N
Height Range	Max. Stroke	Width Range	Max. Load
40 mm /s	≤ 50 dB	 White RAL9003Y	 Black RAL9005A
Speed	Noise	 Silver RAL7038	

Measurement(mm)

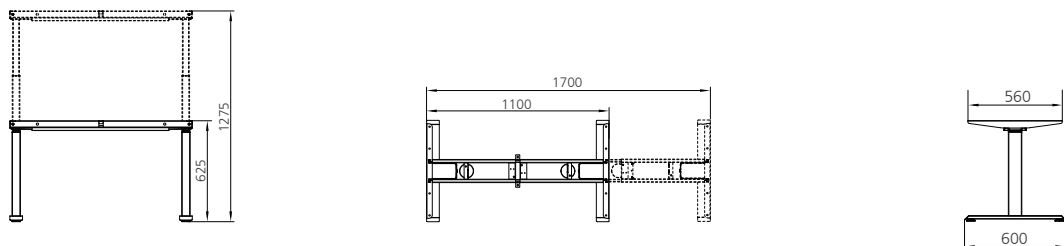

DF01S Max




Features

- High strength carbon steel
- 3-Stage
- Laser cutting / welding
- Dual motor
- Soft start / stop
- Wired / wireless control

Specification

660 -1310 mm	650 mm	1640 - 2100 mm	2000N
Height Range	Max. Stroke	Width Range	Max. Load
22 mm /s	≤ 50 dB	 White RAL9003Y	 Black RAL9005A
Speed	Noise	 Silver RAL7038	

Measurement(mm)

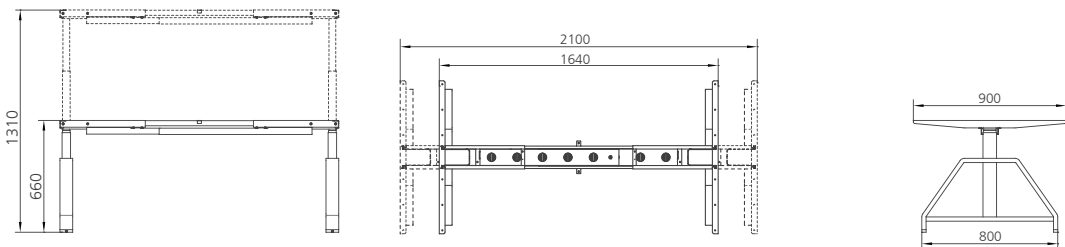

DF02N




Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Triple motor
- Soft start / stop
- Wired / wireless control

Specification

625-1275 mm	650 mm	1920-2900 mm	1500N
Height Range	Max. Stroke	Width Range	Max. Load
40 mm /s	≤ 50 dB	  	
Speed	Noise	White RAL9003Y Silver RAL7038 Black RAL9005A	

Measurement(mm)

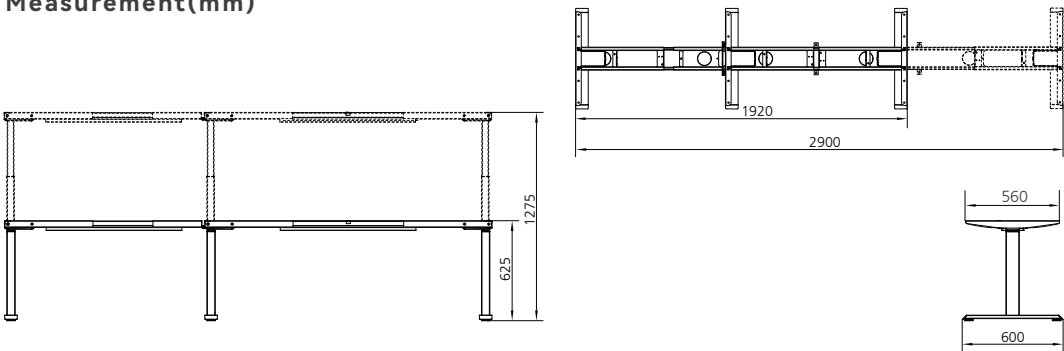

DF03N




Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Triple motor
- Soft start / stop
- Wired / wireless control

Specification

625-1275 mm	650 mm	1100-1700 mm (Main) 820-1200 mm (Side)	1500N
Height Range	Max. Stroke	Width Range	Max. Load
40 mm /s	≤ 50 dB	  	
Speed	Noise	White RAL9003Y Silver RAL7038 Black RAL9005A	

Measurement(mm)

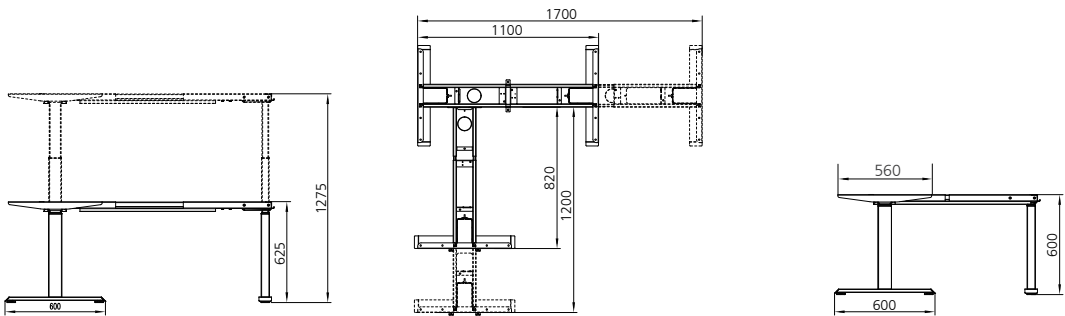

DF03P




Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Triple motor
- Soft start / stop
- Wired / wireless control

Specification

625 -1275 mm	650 mm	1230 - 1810mm	1500N
Height Range	Max. Stroke	Width Range	Max. Load
40 mm /s	≤ 50 dB	 White RAL9003Y	 Silver RAL7038
Speed	Noise	 Black RAL9005A	

Measurement(mm)

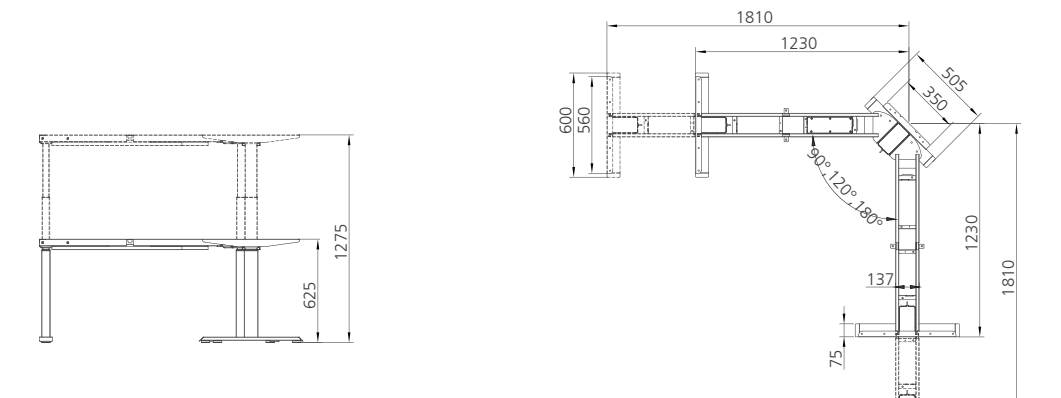

DF04N




Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Dual motor
- Soft start / stop
- Wired / wireless control

Specification

625 -1275 mm	650 mm	1100 - 1700 mm	1200N
Height Range	Max. Stroke	Width Range	Max. Load
40 mm /s	≤ 50 dB	 White RAL9003Y	 Silver RAL7038
Speed	Noise	 Black RAL9005A	

Measurement(mm)

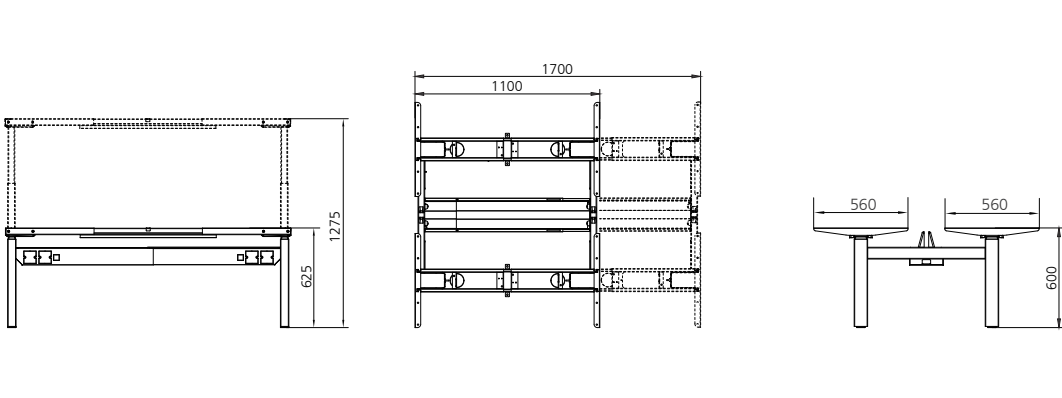

DF011



Features

- High strength carbon steel
- 2-Stage
- Laser cutting / welding
- Single motor
- Soft start / stop
- Wired / wireless control

Specification

690 -1150 mm

Height Range

460 mm

Max. Stroke

880 - 1300 mm

Width Range

800N

Max. Load

25 mm /s

Speed

≤ 50 dB

Noise



White
RAL9003Y






Silver
RAL7038



Black
RAL9005A

Measurement(mm)



DF12T



Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Single motor
- Soft start / stop
- Wired / wireless control

Specification

706 -1206 mm

Height Range

500 mm

Max. Stroke

32 mm /s

Speed

300N

Max. Load

≤ 50 dB

Noise



White
RAL9003Y






Silver
RAL7038



Black
RAL9005A

Measurement(mm)



DF013




Features

- High strength aluminium alloy
- 2-Stage
- Laser cutting / welding
- Dual motor
- Soft start / stop
- Wired / wireless control

Specification

660 -1060 mm	400 mm	1270 - 2060 mm	4000N
Height Range	Max. Stroke	Width Range	Max. Load
4 - 16 mm /s	≤ 50 dB	 White RAL9003Y	 Silver RAL7038
Speed	Noise	 Black RAL9005A	

Measurement(mm)

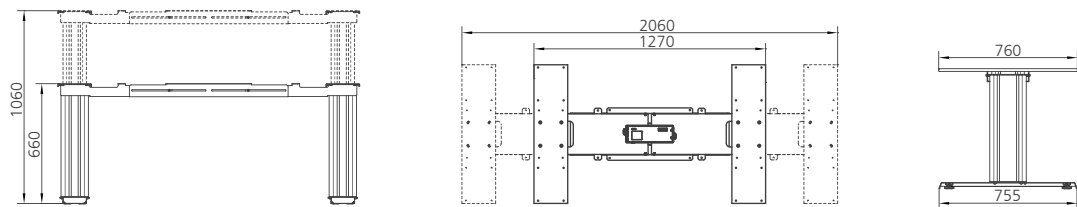

DF015




Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Single motor
- Soft start / stop
- Wired / wireless control

Specification

700 -1200 mm	500 mm	32 mm /s	300N
Height Range	Max. Stroke	Speed	Max. Load
≤ 50 dB	 White RAL9003Y	 Silver RAL7038	 Black RAL9005A
Noise			

Measurement(mm)

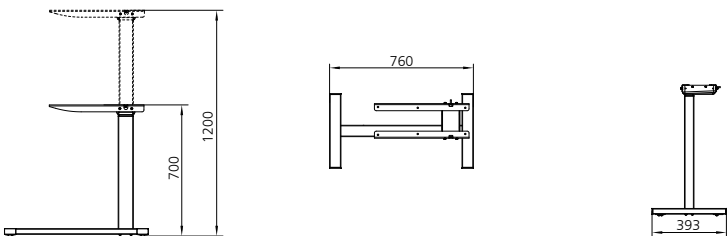

DF017N




Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Triple motor
- Soft start / stop
- Wired / wireless control


Specification

625 -1275 mm	650 mm	1120 - 1670 mm	1500N
Height Range	Max. Stroke	Width Range	Max. Load
40 mm /s	≤ 50 dB	 White RAL9003Y	 Silver RAL7038
Speed	Noise	 Black RAL9005A	

Measurement(mm)

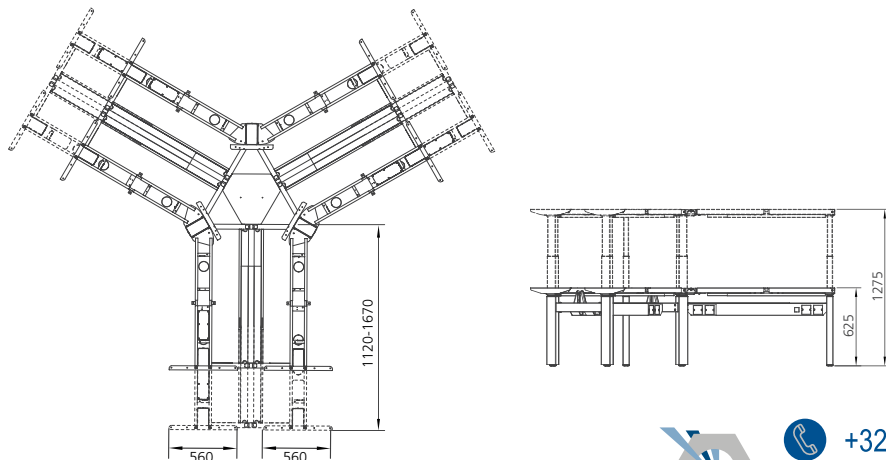

DF019N

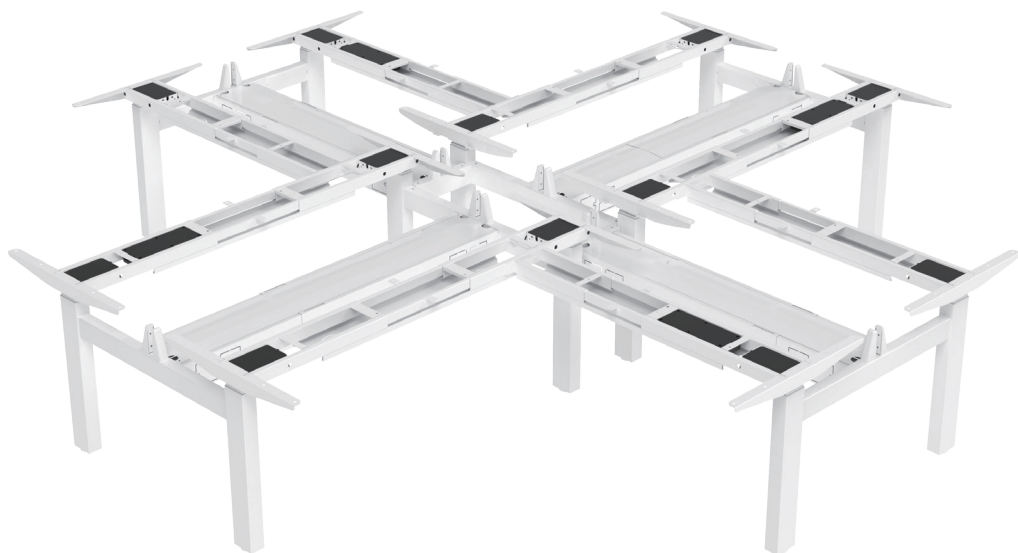


Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Triple motor
- Soft start / stop
- Wired / wireless control

Specification

625 -1275 mm	650 mm	1110 - 1710 mm	1500N
Height Range	Max. Stroke	Width Range	Max. Load
40 mm /s	≤ 50 dB	 White RAL9003Y	 Silver RAL7038
Speed	Noise	 Black RAL9005A	

Measurement(mm)

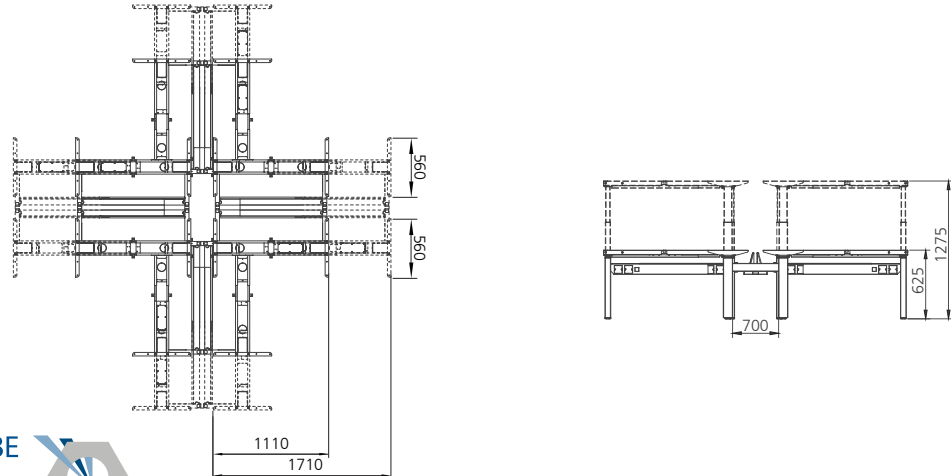

DF031



Features

- High strength carbon steel
- 2 / 3 stage lifting columns
- Laser cutting / welding
- Dual motor
- Soft start / stop
- Wired / wireless control

Specification

625 -1275 mm

Height Range

650 mm

Max. Stroke

600 * 1200 mm

Frame Size

1200N

Max. Load

40 mm /s

Speed

≤ 50 dB




Noise

White
RAL9003Y

Silver
RAL7038

Black
RAL9005A

Measurement(mm)



High-performance Lifting Columns

Based on different needs,
we offer 2 / 3-stage lifting columns,
featuring smooth movement,
low noise and heavy load,
which could perfectly fit multiple styles of desk frames.

L5E2




L5C2



L5R2



L5S2

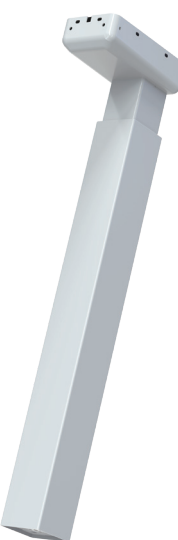

Features

- 2-Stage
- High strength carbon steel
- Laser cutting / welding
- Hole-free columns
- Color customization

Specification

650 mm

Installation Size

500 mm

Max. Stroke

1150 mm

Max. Height

800N

Max. Load

32 mm /s

Speed

≤50 dB

Noise



White
RAL9003Y



Silver
RAL7038



Black
RAL9005A

Features

- 2-Stage
- High strength carbon steel
- Laser cutting / welding
- Hole-free columns
- Color customization

Specification

650 mm

Installation Size

500 mm

Max. Stroke

1150 mm

Max. Height

800N

Max. Load

32 mm /s

Speed

≤50 dB

Noise



White
RAL9003Y





Silver
RAL7038





Black
RAL9005A


Measurement(mm)

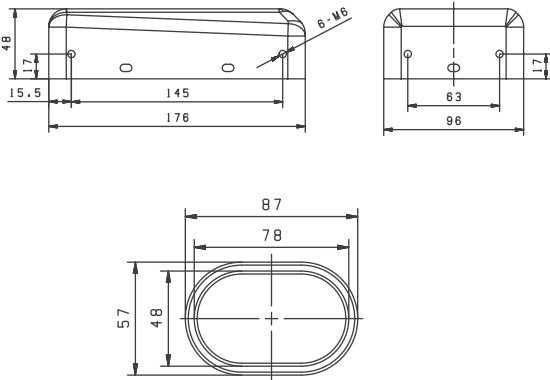


Measurement(mm)

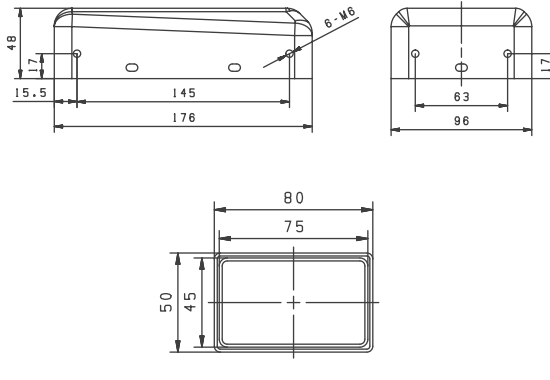

L5R2P

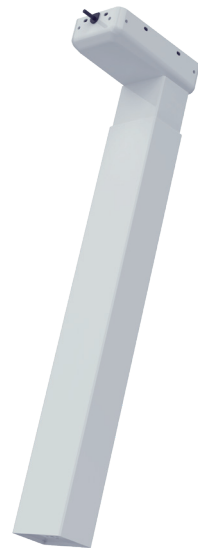

L5S2P

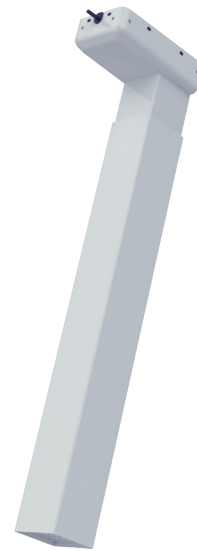

L6E2



L6C2



Features

- 2-Stage
- High strength carbon steel
- Laser cutting / welding
- Hole-free columns
- Color customization

Specification

650 mm

Installation Size

500 mm

Max. Stroke

1150 mm

Max. Height

800N

Max. Load

32 mm /s

Speed

≤ 50 dB

Noise



White
RAL9003Y



Silver
RAL7038



Black
RAL9005A

Features

- 3-Stage
- High strength carbon steel
- Laser cutting / welding
- Hole-free columns
- Color customization

Specification

585mm

Installation Size

650 mm

Max. Stroke

1235 mm

Max. Height

800N

Max. Load

40 mm /s

Speed

≤ 50 dB

Noise



White
RAL9003Y






Silver
RAL7038






Black
RAL9005A

Measurement(mm)

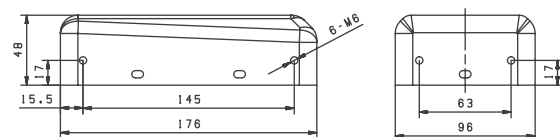


Measurement(mm)

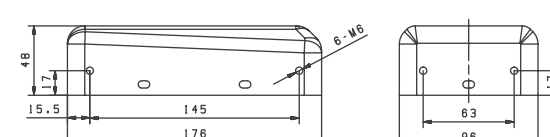


L6R2




L6S2

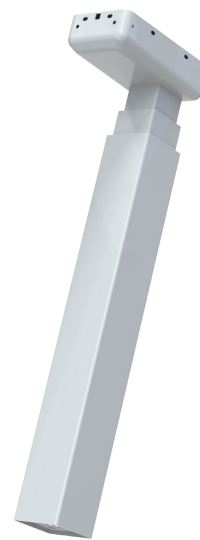

L6R2P

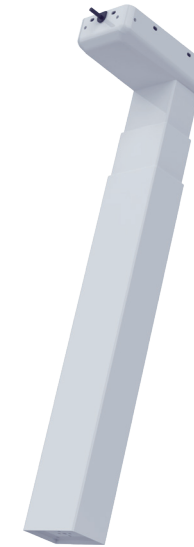

L6S2P

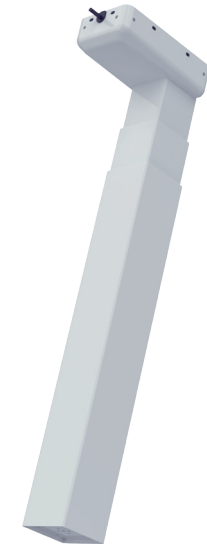

Features

- 3-Stage
- High strength carbon steel
- Laser cutting / welding
- Hole-free columns
- Color customization

Specification

585 mm

Installation Size

650mm

Max. Stroke

1235 mm

Max. Height

800N

Max. Load

40 mm /s

Speed

≤ 50 dB

Noise



White
RAL9003Y



Silver
RAL7038



Black
RAL9005A

Features

- 3-Stage
- High strength carbon steel
- Laser cutting / welding
- Hole-free columns
- Color customization

Specification

585 mm

Installation Size

650mm

Max. Stroke

1235 mm

Max. Height

800N

Max. Load

40 mm /s

Speed

≤ 50 dB

Noise



White
RAL9003Y






Silver
RAL7038






Black
RAL9005A

Measurement(mm)



Measurement(mm)





L6C2-20

- 681*77*52mm



DF01S-03M0

- 600*75*26mm



C31E

- Number of motors controllable: 1
- Rated Power: 100W
- Connectable to lithium Battery
- Overheat / Overload protection



C32E

- Number of motors controllable: 2
- Rated Power: 200W
- Connectable to lithium battery
- Overheat / Overload protection



DF01S-03P0

- 600*75*26mm



DF01N-03A0

- 600*75*20mm



C33E

- Number of motors controllable: 3
- Rated Power: 300W
- Connectable to lithium battery
- Overheat / Overload protection



C34

- Number of motors controllable: 4
- Rated Power: 600W
- Connectable to lithium battery
- Overheat / Overload protection



DF011-5500

- 580*60*20mm



C66

- Multi-function convertor
- Bluetooth
- Gyro-sensor
- Connectable to 2 controls



HL1

- 3 Memory position
- LED height display
- Lock



HL9

- Silicon button
- Small and compact design



HL22

- 4 Memory position
- LED height display
- Lock
- Type-A / C
- Built-in control



HL23

- 3 Memory position
- LED height display
- Lock
- Built-in control



HL13

- 4 Memory position
- Touch Screen
- LED height display
- Lock



HL15

- 4 Memory position
- LED height display
- Lock



HL29

- 3 Memory position
- LED height display
- Silicon button
- Lock



HL33

- 4 Memory position
- Sedentary alert
- LED height display
- Lock
- Type-A / C



HL17U

- 4 Memory position
- LED height display
- Lock
- Type-A / C



HL19

- Tilting switch
- Ergonomic design



HL36

- 2 Memory position
- OLED height display
- Lock



C51

- Wireless
- Build in battery
- Bluetooth connection
- Height display
- 2 Memory position



DP001

- Height range:245-460mm
- Width range:85-175mm
- Max. load:15kg



DP002

- Height range:260-505mm
- Width range:150-270mm
- Max. load:15kg




DP006

- Length range:380-530mm
- Width range:150-240mm
- Height range:300-530mm
- Max. load:15kg




DP007-1

- Length:250mm
- Width:195mm
- Max. load:10kg

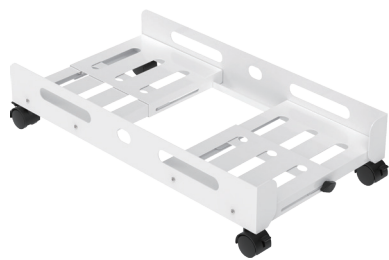

DP003

- Length:460mm
- Width range:180-240mm
- Max. load:15kg

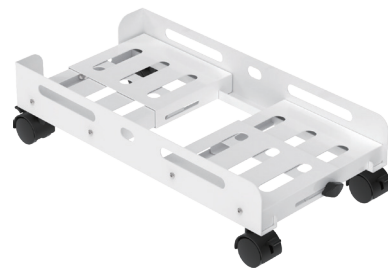

DP004

- Length:630mm
- Width range:230-340mm
- Max. load:15kg



DP007-2

- Length:290mm
- Width:275mm
- Max. load:10kg