


Ergomat XL Bubble Mat

The Ergomat XL Bubble is made of pure polyurethane and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the ultimate 1" thick ergonomic mat for dry environments or where static control is a must.

XL BUBBLE 

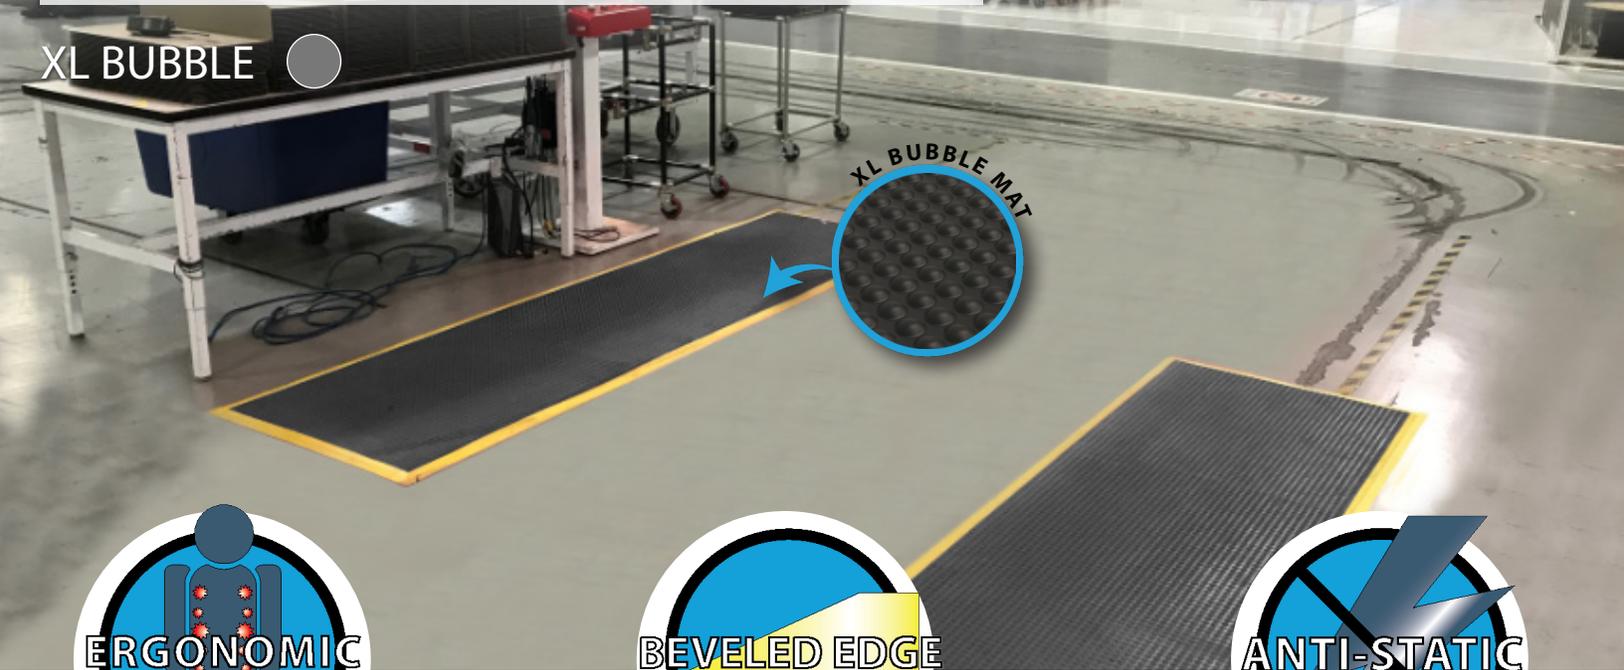

Profile

XL Bubble Mat



Thickness 1" (25 mm)

BENEFITS

ERGONOMIC: Designed to stimulate circulation in feet, legs and lower back. Circulation is stimulated by the unique, patented surface profile of Ergomat mats, which forces muscular response.

BEVELED EDGES: Always comes with yellow bevels. Bevels will never curl up, eliminating trip hazards.

ANTI-STATIC: Ideal for environments requiring static control.

ANY SIZE ANY SHAPE: Can be custom made in any size and shape, creating one continuous surface to eliminate seams and trip hazards.

SILICON FREE: All Ergomat mats are silicon free.

TRUE WARRANTY: Ergomat stands 100% behind our products with full replacement coverage if our product fails to perform as promoted within that period. At Ergomat we call this a *True Warranty*.

Ergomat XL Bubble Mat

XL Bubble

Material.....	Foamed Polyurethane
Color	Grey
Weight.....	3900 g +/- 50 g // 8.6 lbs +/- 0.1 lbs
Length without beveled edges ..	87.6 cm +/- 1% // 34.5" +/- 0.38"
Width without beveled edges...	59 cm +/- 1% // 23.25" +/- 0.38"
Thickness	25 mm // 1"
Density.....	380 kg/m ³ +/- 10 % ISO 2781
Hardness	22-30 Sh A DIN 53505
Compression Pressure face = ø 100mm % by pressure of 240kg	50% Tinby A/S Standard
Abrasion Load = 5 N	180 mm ³ // 7 in ³ ISO 46 49 (5 N)
Electrical Resistance Surface point to point % 50 RH	1x10 ⁹ Ω-5x10 ⁹ Ω ESDSTM7
Breaking Point/Tensile Strength	2 Mpa EN ISO 527-1
Elongation at Break	500% EN ISO 527-1
Tearing Strength	4 N/mm ASTM D 624
Thermal properties	
Minimum use.....	0°C // 32°F
Maximum use	32°C // 90°F
Maximum short duration	40°C // 115°F
UV-Resistance	Inferior
Hydrolic Resistance	Inferior
Warranty	5 years